



If you have any questions, please contact Lang-Mekra Technical Support.
www.lang-mekra.com Tel: 1-888-MEKRA-4-U Email: quality@lang-mekra.com Fax: (803) 337 5265

International Premium Series Mirror System Manual





If you have any questions, please contact Lang-Mekra Technical Support.
www.lang-mekra.com Tel: 1-888-MEKRA-4-U Email: quality@lang-mekra.com Fax: (803) 337 5265

Product Features

- ❑ Replaceable Components
- ❑ Minimal Diagnosis & Repair Time
- ❑ Spring-Loaded Fold-Away
- ❑ Remote Control Main Mirror
- ❑ Self-Regulating Heaters
- ❑ Integrated Marker Light
- ❑ Look-Down Mirror on Passenger Side

Customer Support

Toll-Free Support Hotline
1-888-MEKRA-4-U

Web-Accessible Service Manuals
& Product Updates
www.lang-mekra.com

E-Mail
quality@lang-mekra.com

Fax: (803) 337-5265

These Products May Be The Subject of Pending U.S. Patent Applications or May Be Covered By One or More of the Following U.S. Patents: 4,991,950
5,110,196 5 137,247 5,196,965 385,243 5,687,035 387,317



Contents

General Procedures


- G.1 Removal of Complete Bracket Assembly
- G.2.1 Changing Upper Fastener Kit
- G.2.2 Removing or Adjusting Look-Down Mirror
- G.3 Removing or Installing the Back Cover
- G.4 Removing, Installing or Adjusting Mirror Heads
- G.5.1 Mirror Plate Exchange - Removing Main and Convex Mirror Plate
- G.5.2 Mirror Plate Exchange - Removing Look-Down Mirror Plate
- G.5.3 Mirror Plate Exchange - Installing Mirror Plate
- G.6 General Maintenance and Cleaning Tips

Troubleshooting & Repair

- T.1.1 Bracket Does Not Fold Back
- T.1.2 Bracket Folds Back Too Easily
- T.2.1 Mirror Movement Analysis Flowchart
- T.2.2 Mirror Movement Analysis
- T.2.3 Motor (Actuator) Replacement – Main Head
- T.3 Convex Pivot Assembly
- T.4 Mirror Frame (Bezel) Replacement
- T.5.1 Wiring & Connections
- T.5.2 Control Cable Replacement
- T.5.3 CB Cable Replacement
- T.6.1 Mirror Heat Analysis Flowchart
- T.6.2 Mirror Heat Analysis
- T.7 Surface Finishes

Warranty

- W.1 Warranty Coverage
- W.2 Available Service Parts
- W.3 Illustrations

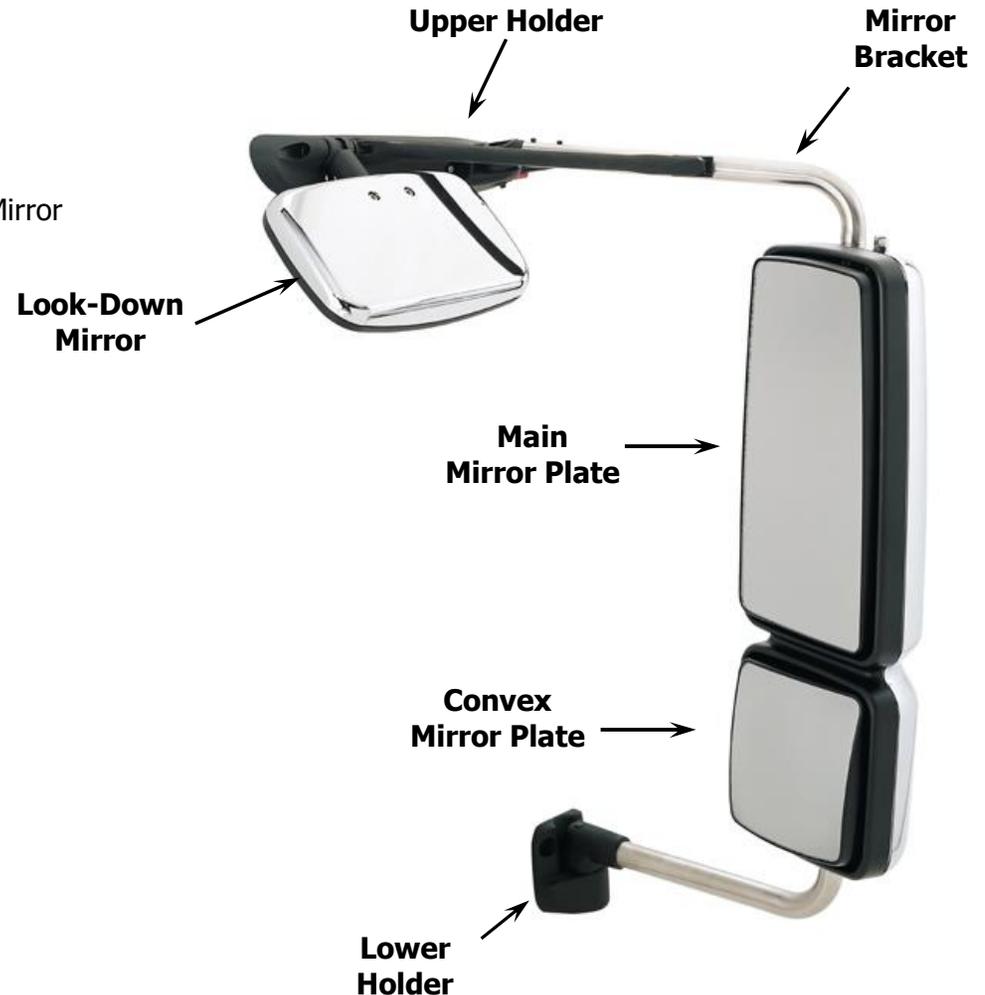





(G.1) Removal of Complete Bracket Assembly

- 1) Remove antenna from antenna base.
- 2) Disconnect control cable and CB cable inside the cab.
- 3) Remove 3 screws from upper holder, using a T-40 driver.
Be sure to hold the mirror steady to prevent damage or personal injury.

Important! DO NOT use the flip-out arm as a handle to hold or carry the mirror!



- 4) Remove the 3 screws from the lower holder, using a T-40 driver.

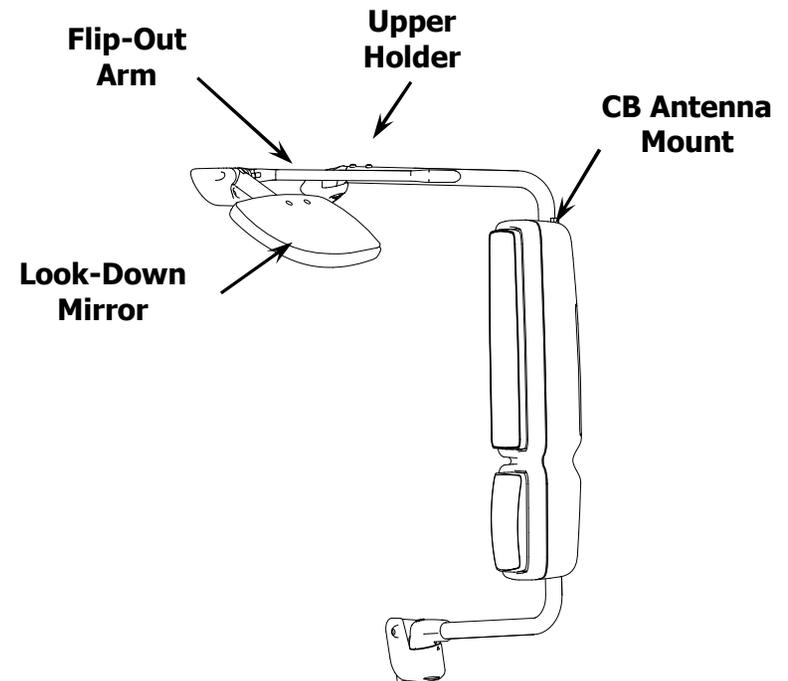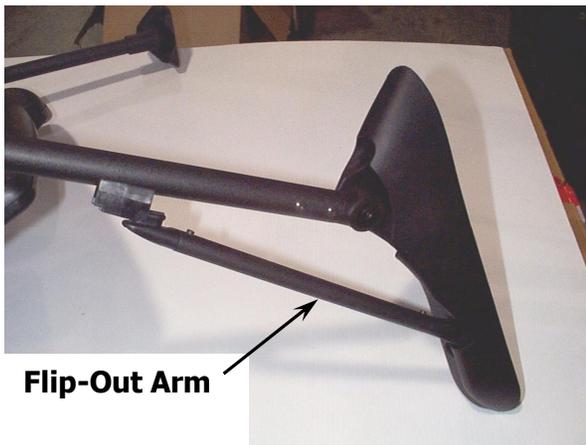

(G.2.1) Changing the Upper Fastener Kit

Important—hold the mirror and bracket system in place firmly throughout this process to avoid damaging the door or the mirror.

1. Remove fastener kit, using a 13 mm socket and a 6 mm allen wrench. Hold the mirror in place to prevent it from falling.
2. Assemble upper fastener kit as shown.
3. Hand-tighten nut on bolt. Torque nut to 10 N-m (7.3 ft-lbs).

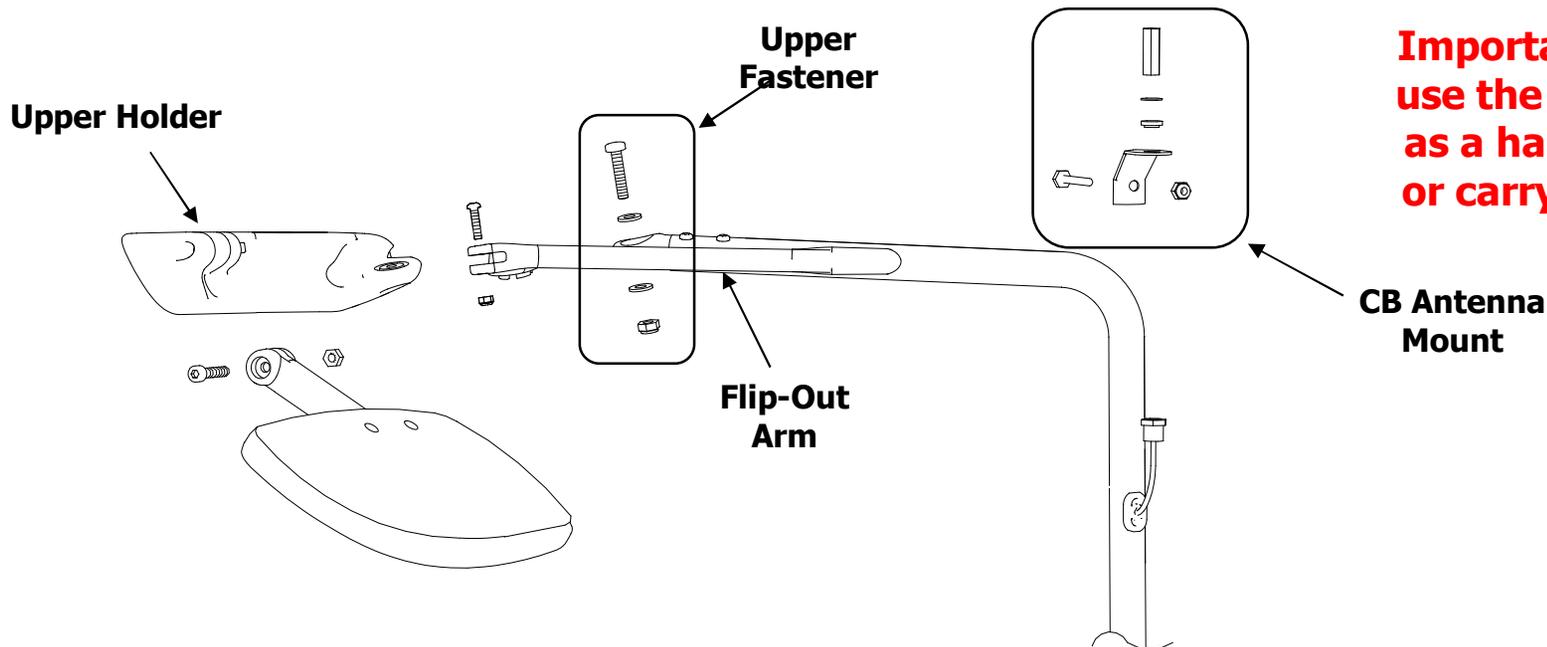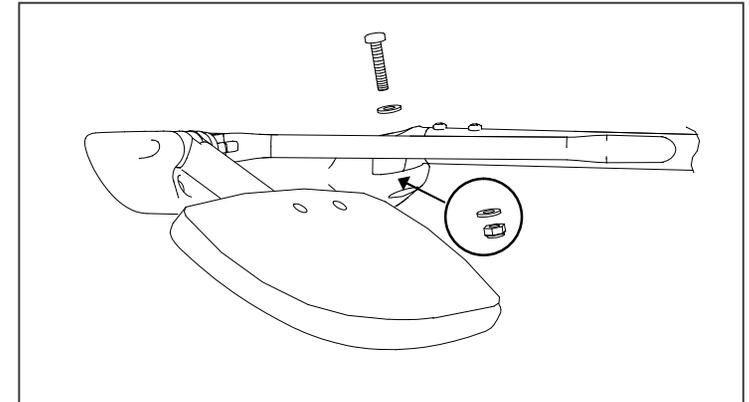

Important! DO NOT use the flip-out arm as a handle to hold or carry the mirror!




(G.2.2) Removing or Adjusting Look-Down Mirror

To remove or adjust the look-down mirror, use a 6 mm allen driver and a 13 mm socket at the look-down mirror nut and bolt. Nominal setting for the look-down mirror nut and bolt is 14 N-m (10 ft-lbs).

Important! DO NOT use the flip-out arm as a handle to hold or carry the mirror!


The flip-out arm is attached by a bolt with a 4 mm allen head, torqued to 3 N-m (2 ft-lbs).

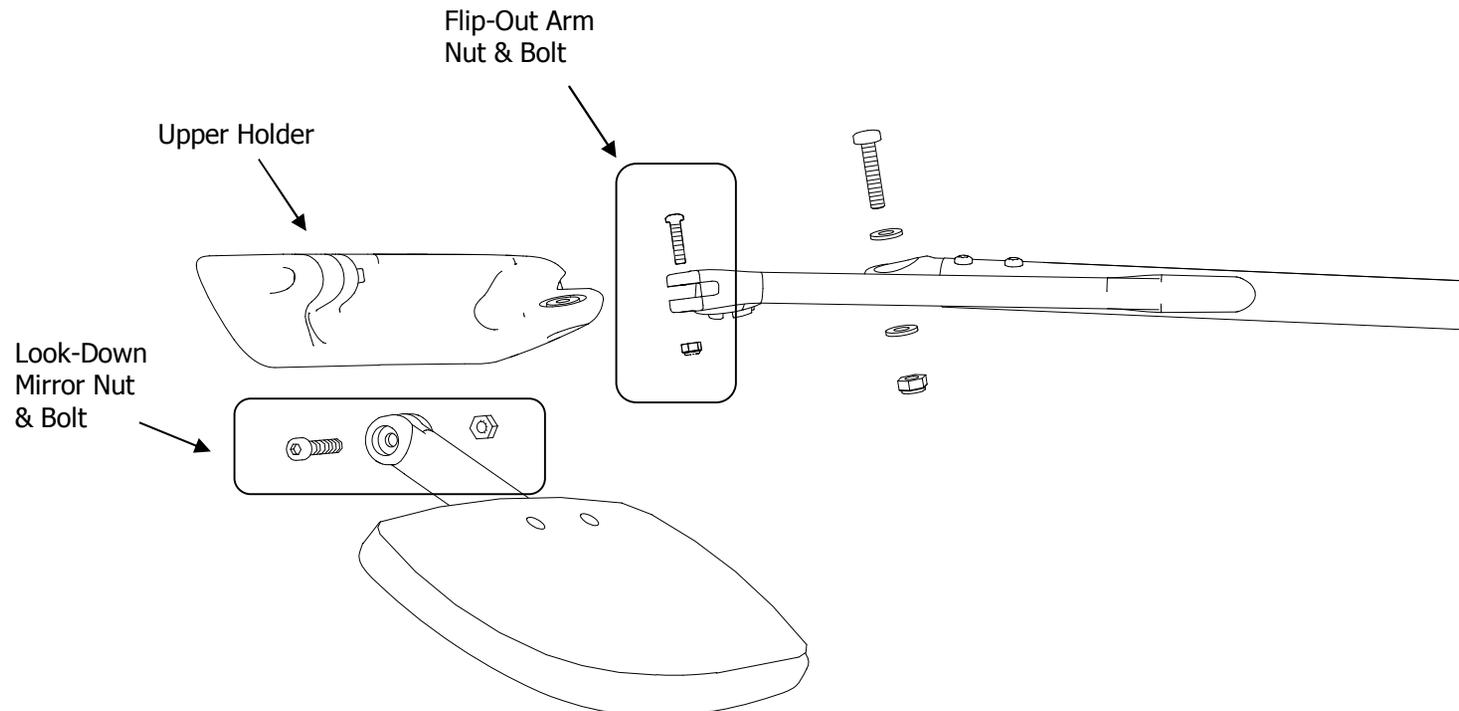


(G.3) Removing or Installing the Back Cover

Removing the Back Cover

1. Remove both mirror plates according to **G.5.1**.
2. Remove the 2 back cover screws.
3. Remove the back cover and housing frame from the assembly, and unplug the marker light. Be sure to secure the upper and lower split covers, so they will not be lost.

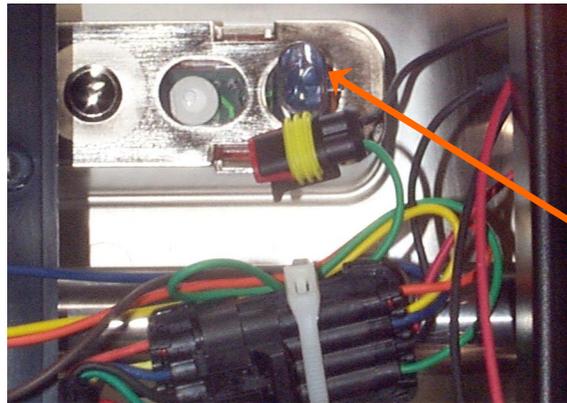

Marker Light Plug

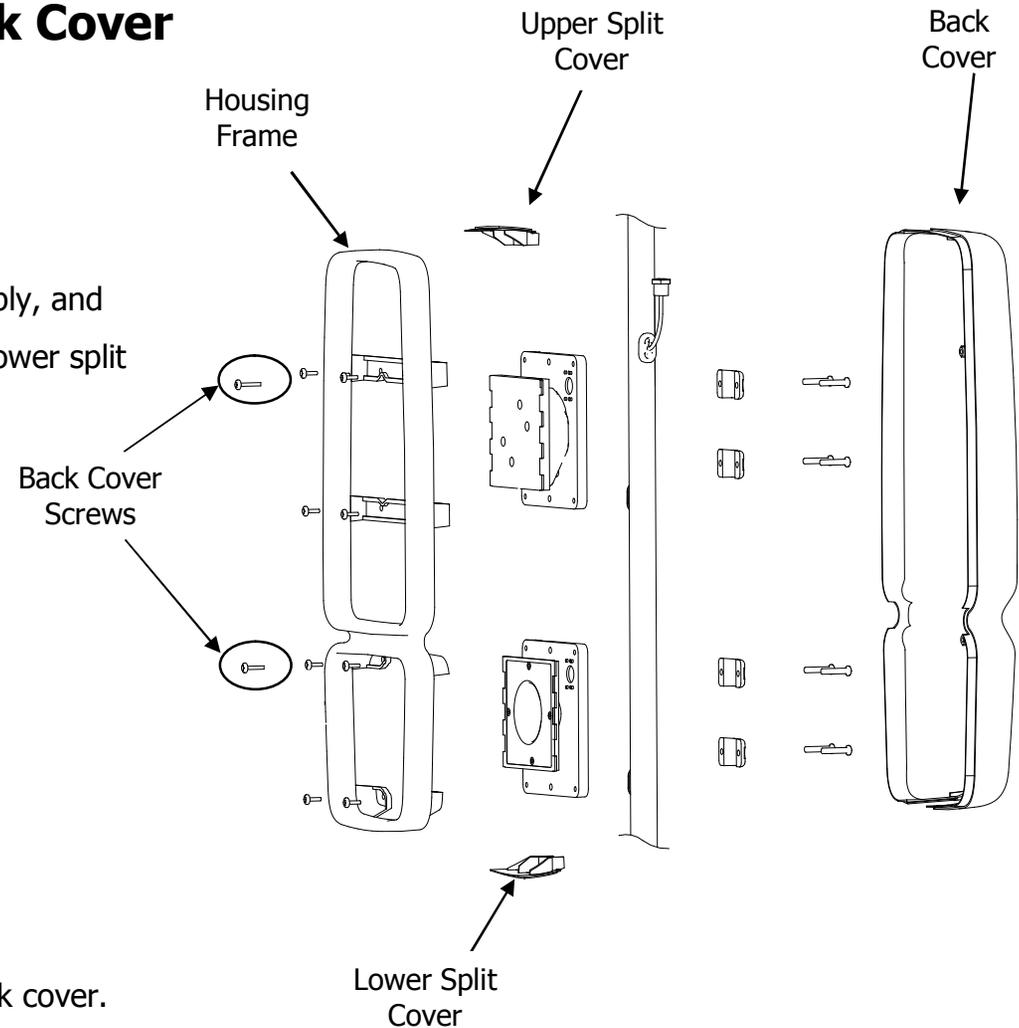

Installing the Back Cover

1. Plug in the marker light, and align the housing with the back cover.
2. Install the 2 back cover screws, using a T-30 driver. Tighten to 4 N-m (3 ft-lbs).
3. Install the mirror plates according to **G.5.2**.

(G.4) Removing, Installing, or Adjusting the Mirror Heads (From the Bracket)

To Adjust Mirror Head

1. Remove the mirror plates according to **G.5.1**.
2. Remove the back cover according to **G.3**.
3. Slightly loosen the clamp screws, using a T-30 driver. To prevent the mirror from sliding down, hold it in place from the bottom.
4. Adjust mirror head to desired position. Tighten 8 clamp screws to 10 N-m.


MAKE SURE THE OPTIMUM VIEWING ANGLE IS ASSURED FOR THE DRIVER OF THE VEHICLE AT ALL TIMES!

To Remove Mirror Head

1. Remove back cover according to **G.3**.
2. Disconnect CB & control cables from mirror head.
3. Remove main and convex structure plate assemblies by removing the 8 clamp screws with a T-30 driver.

To Attach Mirror Head


1. Place the structure plate assemblies on the bracket, and tighten the clamp screws to 9 N-m (6.5 ft-lbs).
2. Attach the back cover and housing frame according to **G.3**.
3. Route and connect CB & control cables.
4. Install mirror plates according to **G.5.2**.

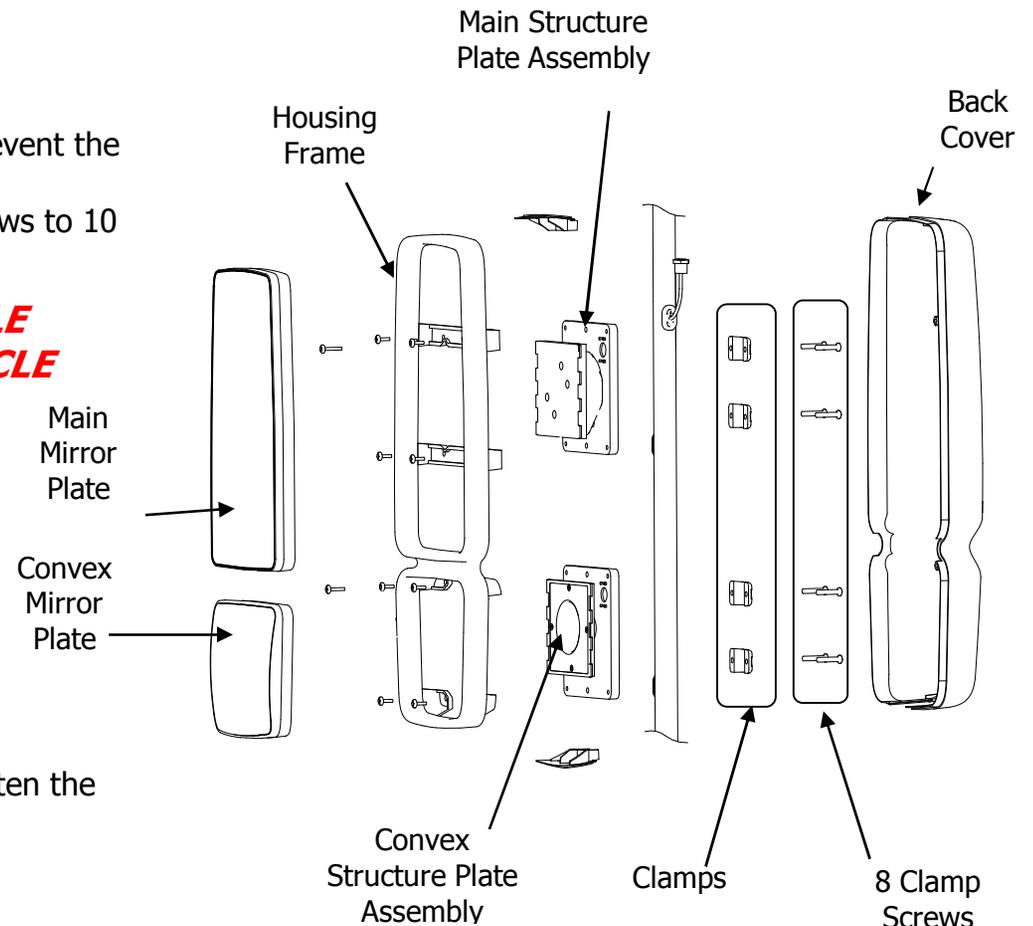

(G.5.1) Mirror Plate Exchange - Removing Mirror Plate

Your Lang-Mekra mirror system is equipped with a durable mirror plate. The mirror glass is reinforced with anti-shatter adhesive to minimize splintering in the event of breakage. We strongly recommend the prompt replacement of damaged mirror plates.

Both heated and non-heated replacement glass plates are available. If you have a heated mirror, be careful not to damage the wiring or the heater connections when changing the mirror plate, especially when detaching heater wires from the mirror plate. Make sure you pull or push on the wire terminal, rather than the wire itself.

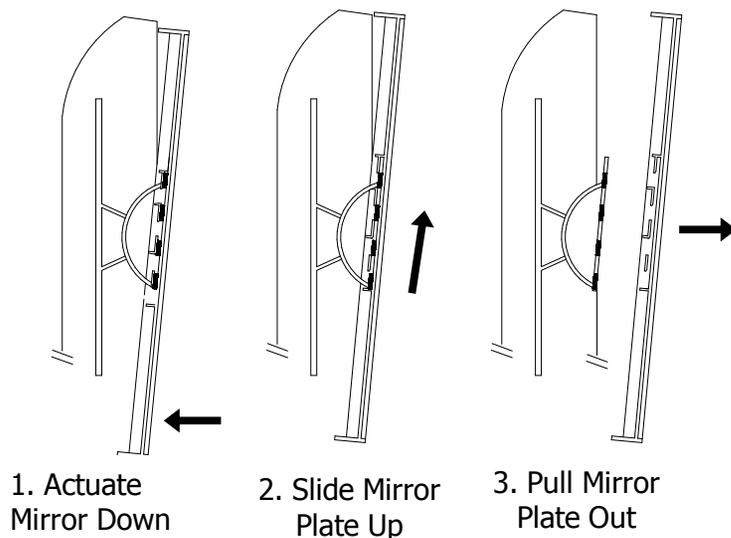

Note: The procedure is the same for both main and convex mirror plates.




(G.5.2) Remove Look-Down Mirror Plate

1. Use a flat-head screwdriver to push in the locking tabs through the access slits along the mirror housing. DO NOT use the screwdriver to pry the mirror plate!
2. Push tab on one end of the mirror plate first, then continue pushing tabs around the mirror until the plate is loose
3. Remove the mirror plate from the housing



(G.5.3) Mirror Plate Exchange - Installing Mirror Plate

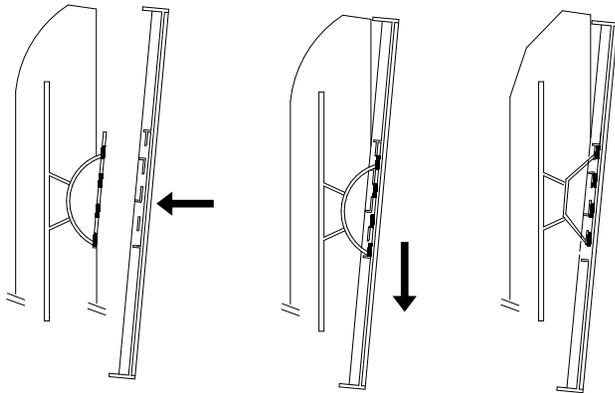


1. Actuate Socket Plate Down, Install Mirror Plate (Align Teeth)

2. Slide Mirror Plate Down to Engage Locking Teeth

3. Actuate Mirror to Desired Position

Reminders:

- When attaching the mirror plate, be sure to match the locking teeth on the socket plate with the locking tabs on the mirror plate.
- When attaching the heater wires, be sure to push on the wire terminal covers. Do not push or pull on the wires.

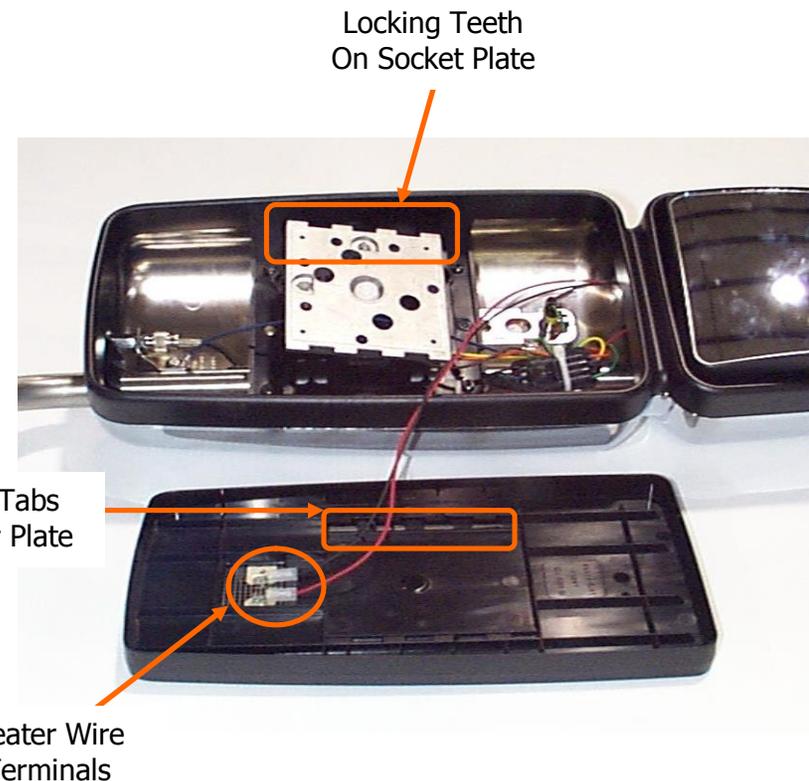

Note: The procedure is the same for both main and convex mirror plates.




(G.6) General Maintenance and Cleaning Tips

There are two main types of mirror glass: 1st surface and 2nd surface. Each type has different properties. 1st surface glass has an exposed reflective surface. 2nd surface glass has a shielded reflective surface. When cleaning 1st surface mirror glass, abrasive cleaners or brushes should be avoided. Excessive abrasion may damage the reflective surface. 2nd surface glass can be scratched, but the reflective surface will not be damaged.


A standard glass cleaner and a soft, clean cloth should be used to clean the mirror surface.

To verify whether you have 1st or 2nd surface glass, place an object such as a pen on the glass surface. Angle the pen to one side, so that you can see the tip. If there is a gap between the tip of the object and the tip of the image, your glass is 2nd surface. If there is no gap between the tip of the object and the tip of the image, your glass is 1st surface.

1st Surface Glass

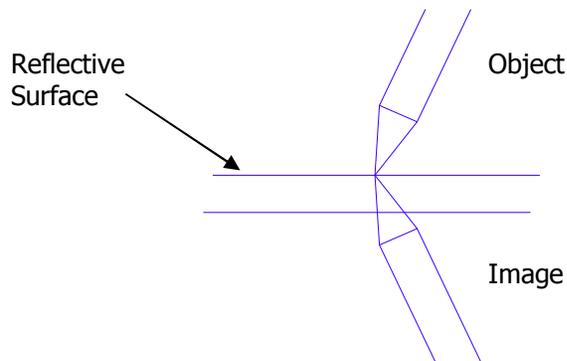

2nd Surface Glass

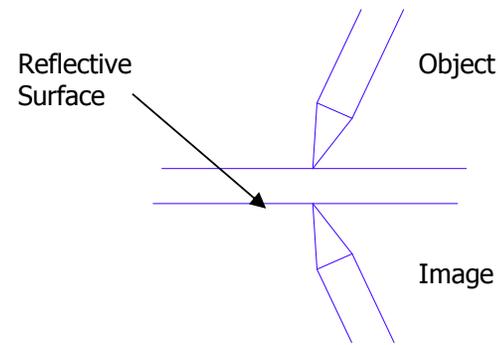



(T.1.1) Bracket Does Not Fold Back, or is Difficult to Fold Back

The mirror brackets are equipped with a fold-away feature, sometimes referred to as a break-away system. The mirrors will fold forward or backward manually, or upon impact. This feature minimizes damage to the mirror system and the door. The upper holder is designed to give the bracket stability. However, the upper fastener kit may sometimes require adjustment. See G.2 to service the upper fastener. If the break-away force is too high (difficult to fold back), you may loosen the nut in the lower holder. The entire system foldaway force should be between 190 & 320 N. When the detent is in the nominal position, the detent spring should be almost fully compressed.


(T.1.2) Bracket Folds Back Too Easily

If the bracket folds back too easily, check the following:

1. Upper fastener kit (**G.2**) should be torqued to 10 N-m (7.3 ft-lbs). If the upper fastener kit is too loose, tighten it to the specified torque.
2. Ensure the lower pivot is in the correct detent position. The arrow on the front (outer) surface of the holder should align with the arrow on the tube connector.




(T.2.1) Mirror Movement Analysis Flowchart

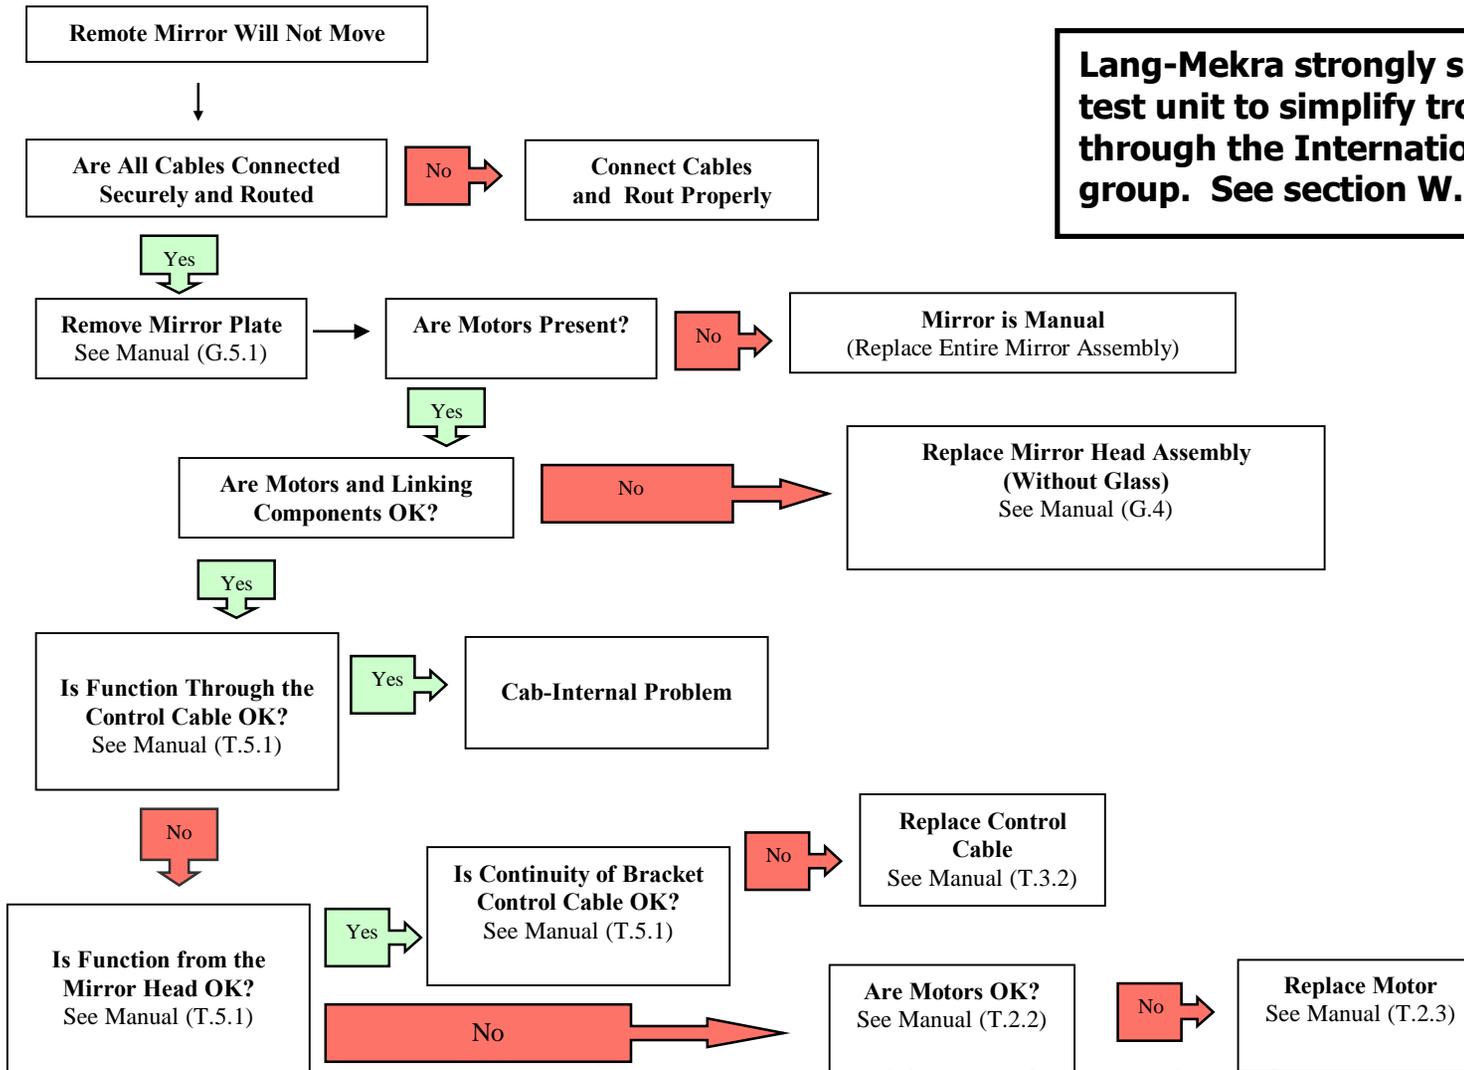

Lang-Mekra strongly suggests the use of a test unit to simplify troubleshooting, available through the International Service Parts group. See section W.2 for details.

(T.2.2) Mirror Movement Analysis


1. Follow the flowchart in **T.2.1** to promptly diagnose mirror movement problems.
2. Make sure all cables and connections are tight.
3. Remove the mirror glass according to **G.5.1**. Check to ensure the mirror is remote (there is a motor present). Sometimes, customer may have a manual mirror with a remote control switch inside the truck. If this is the case, the entire assembly must be replaced if the customer wants a remote control mirror.
4. Are the motors and linking components in good visual condition and function? Apply the motor leads directly to a power source, or use a test unit. If the motor still does not function, replace the appropriate part as indicated in the flowchart.
5. Using a tester unit (or supplying power to the control cable according to **T.5.1**) check the mirror function from the end of the control cable in the dash. If the mirror functions properly, the fault is cab-internal.
6. Using a tester unit (or supplying power directly to the motor according to **T.5.1**) check the function of the mirror head. If the mirror functions at this point, but not from the control cable (under the lower cover), the problem is in the control cable. Check the connections, and if necessary replace the control cable according to **T.5.2**. Always perform a continuity check (see **T.5.1**) on the control cable and confirm the fault before attempting replacement.
7. If the motor does not function when power is directly applied, the motor must be replaced. See **T.2.3** or **T.2.4** for details

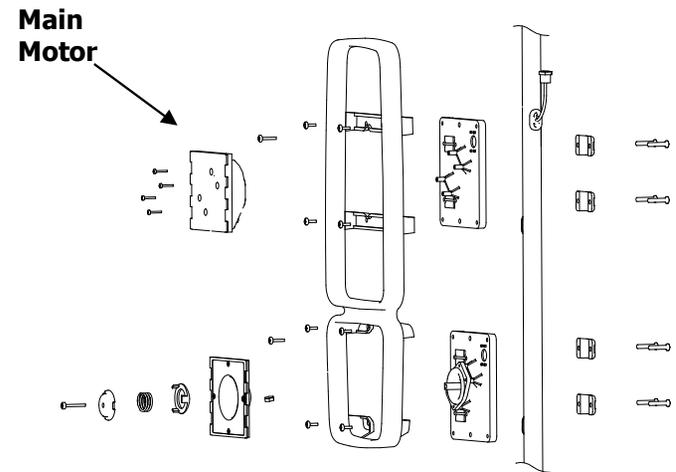


(T.2.3) Motor (Actuator) Replacement for the Main Mirror Head

Actuator Removal

1. Remove mirror plate (**G.5.1**)
2. After identifying the non-functioning motor according to **T.2.1** and **T.2.2**, remove the 4 screws holding the motor, using a
3. T-15 driver as shown.
4. Disconnect the motor wires.




Motor Wires

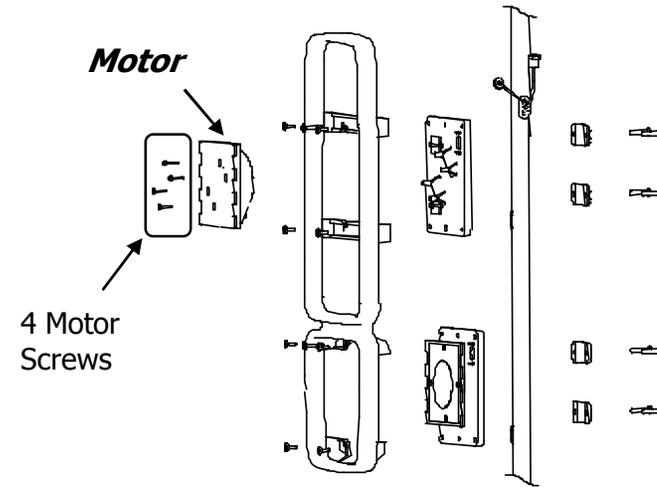

Actuator Installation

1. Fasten motor to structure plate with screws to 2 N-m (1.5 ft-lbs), using a T-15 driver.
2. Route the wires as shown, and tie-wrap to the tube.
3. Reinstall the glass, being sure to connect the heater wires (**G.5.2**).

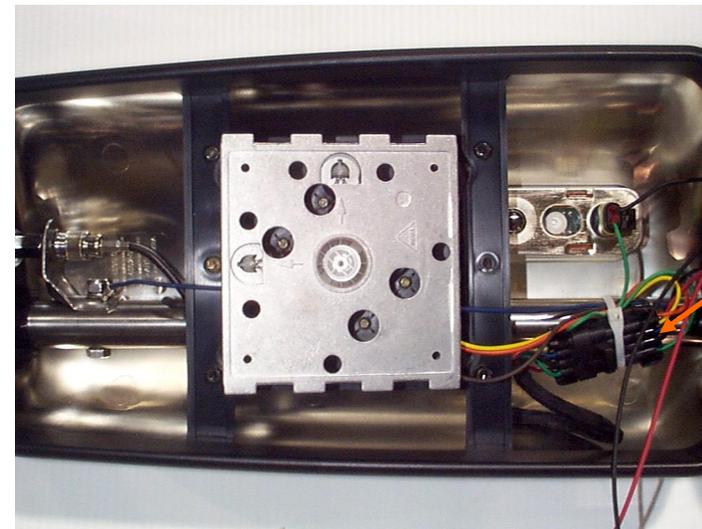

Route the wires as shown, and tie-wrap to the bracket tube.



If you have any questions, please contact Lang-Mekra Technical Support.
www.lang-mekra.com Tel: 1-888-MEKRA-4-U Email: quality@lang-mekra.com Fax: (803) 337 5265




(T.3) Convex Pivot Assembly

The convex pivot assembly provides manual adjustment for the convex glass.

If the convex mirror is too loose, the center pivot screw may be tightened. If the convex mirror is too tight, the central pivot screw may be loosened.


Nominal setting for the center pivot screw is 6 N-m (4 ft-lbs).

The convex pivot assembly should be clean, and free of dirt or debris that may inhibit proper movement.

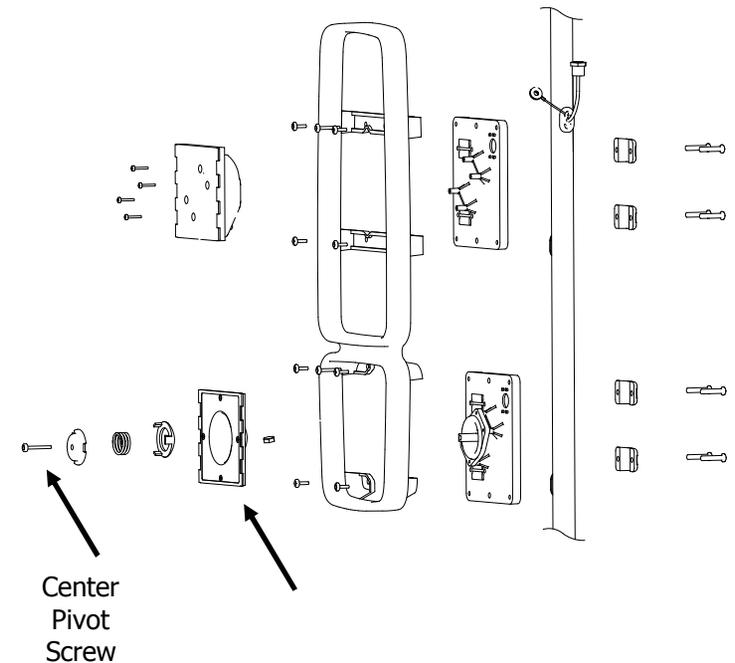

(T.4) Mirror Frame (Bezel) Replacement

1. Remove the back cover according to **G.3**.
2. Remove the clamp screws as shown, using a T-30 driver.
3. Remove both structure plate assemblies using a T-30 driver.
4. Using the new mirror bezel, reverse the steps to rebuild the mirror head. Tighten the structure plate screws to 6 N-m (4 ft-lbs). Tighten the clamp screws to 10 N-m (7.3 ft-lbs).

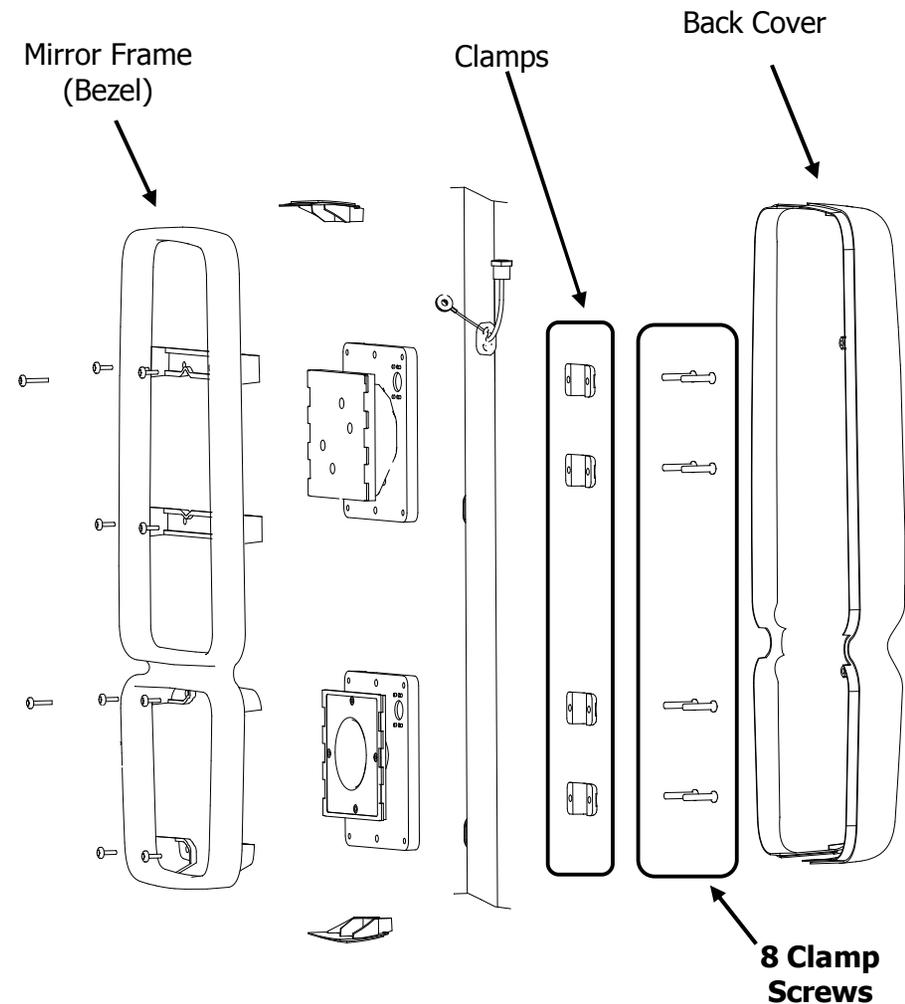



(T.5.1) Wiring & Connections


+ 12 V	Ground	Mirror Action
Brown	Yellow	Main Up
Yellow	Brown	Main Down
Orange	Yellow	Main Left
Yellow	Orange	Main Right

Wire Color	Socket Flange Pin Out	Mirror Action
Red	3	Main Heater
Black	6	Common
Green	5	Light
Yellow	1	Motor (Pin 1) Motor (Pin 4)
Orange	2	Motor (Pin 2)
Brown	4	Motor (Pin3)


Control Cable Schematics				
Circuit Color	Function	Mirror Switch	Pin Out (LH Version)	Pin Out (RH Version)
Orange	Left/Right Control, Driver	B1	A	A
Brown	Up/Down Control, Driver	B3	B	B
Yellow	Motor Common	A3	C	C
Black	Heater / Light Ground	A4	H	H
White	Left/Right Control, Passenger	B2	A	---
Orange	Back Light	A1	E	---
Blue / Green	Up/Down Control, Passenger	B4	C	---
White / Blue	Power Feed	A2	G	---
Red	Heater	----	D	D
Green	Light	----	F	F
Blue	CB Ground	----	J	J

(T.5.2) Control Cable Replacement


To replace the control cable, remove the lower holder, and the lower tube connector. **DO NOT remove the existing cable!** Route the new cable from the bottom, using the existing cable to pull the new cable into position. Insert the cable terminals into the provided 8-position connector according to T.5.1.

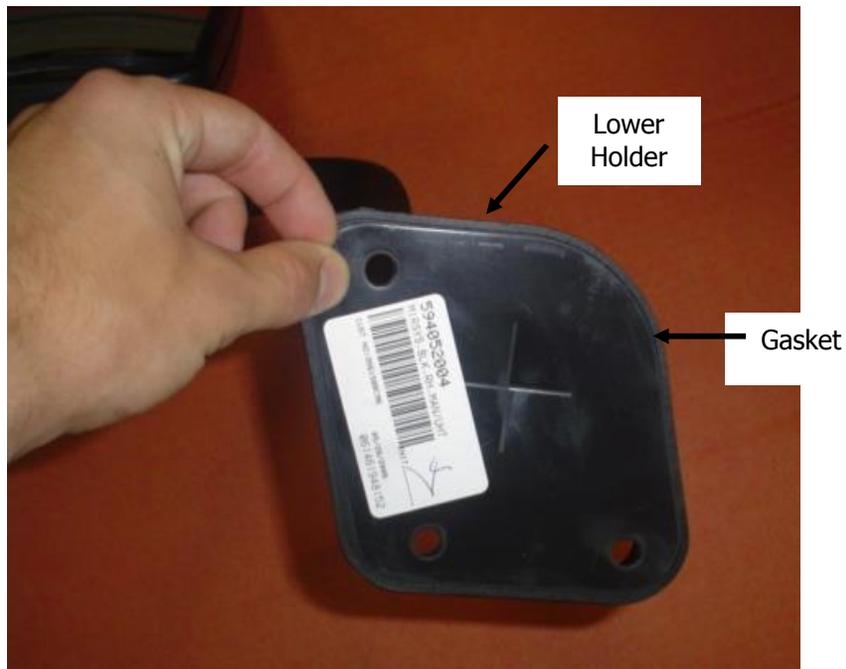

1. Peel off gasket

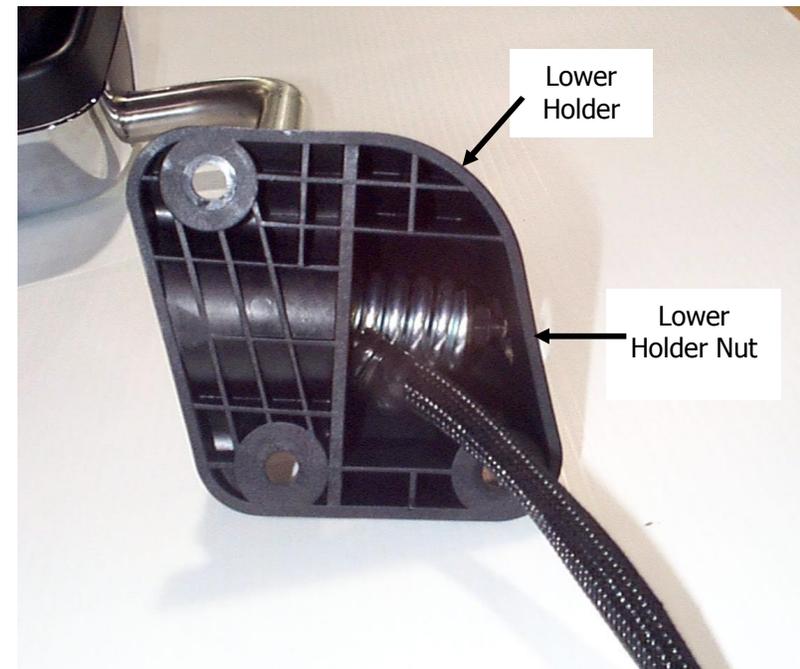

2. Remove the lower holder using a 13 mm socket.

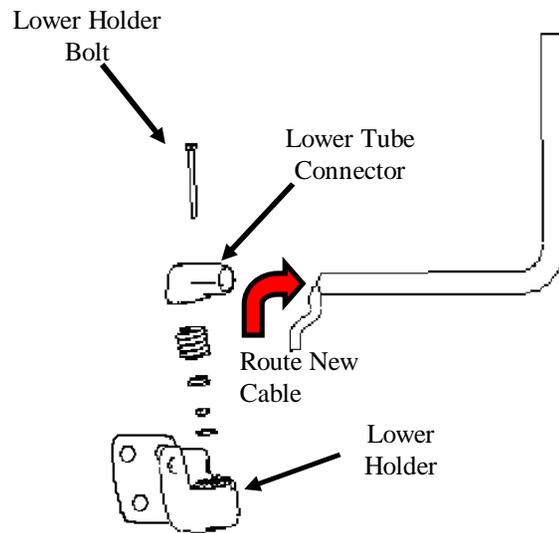


3. Tape the old and new cables together, and route the new cable up the bracket tube, using the existing cable to pull it into location.

Note: After routing the cables, plug terminals according to **T.5.1**. To rebuild the lower holder assembly, the lower holder nut should be torqued to set the system foldaway force between 190 and 320 N. See **T.1.1** and **T.1.2** for details.



(T.6.1) Mirror Heat Analysis Flowchart

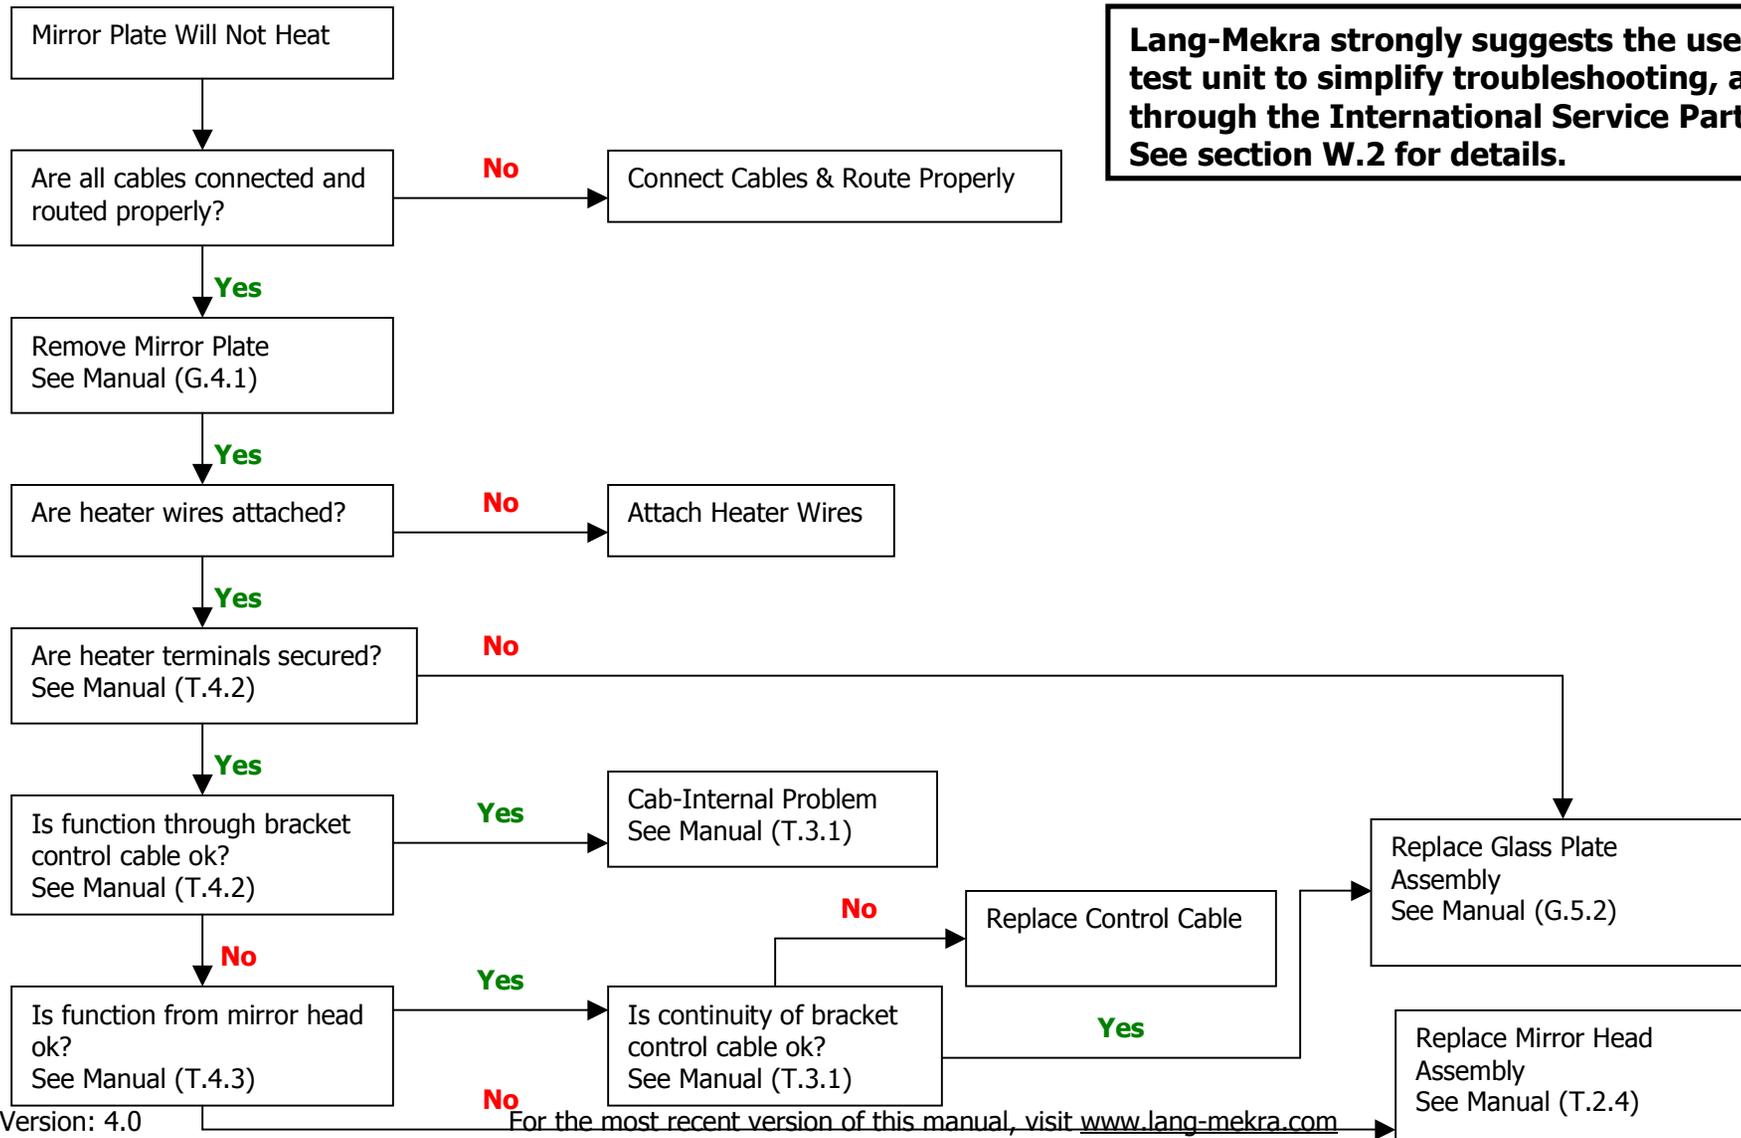


Lang-Mekra strongly suggests the use of a test unit to simplify troubleshooting, available through the International Service Parts group. See section W.2 for details.

(T.6.2) Mirror Heat Analysis

Follow the flowchart in **T.4.1** to diagnose mirror heat problems.

1. Remove the mirror glass according to **G.5.1**. Check to ensure the mirror is heated. (Heater terminals are present.)
2. Make sure all cables and connections are tight.
3. Check to see if the heater terminals are secure. (See Illustration). If not, replace the glass plate assembly.
4. Using a tester unit, or supplying power to the bracket cable according to **T.3**, test the function of the heat from control cable at the door (under the lower cover). If the mirror functions properly, the fault is cab-internal.
5. Using a tester unit, or supplying power to the mirror head socket flange according to **T.3**, test the function of the heat from mirror head. If the heat functions at this point, but not from the control cable, the problem is in the control cable (inside the bracket). Check the connections, and if necessary replace the control cable as indicated in the flowchart. Always perform a continuity check (see **T.3**) on the control cable and confirm the fault before attempting to replace the control cable.
6. If there is no continuity from the socket flange according to **T.3**, the mirror head assembly must be replaced. See **T.2.4** for details.

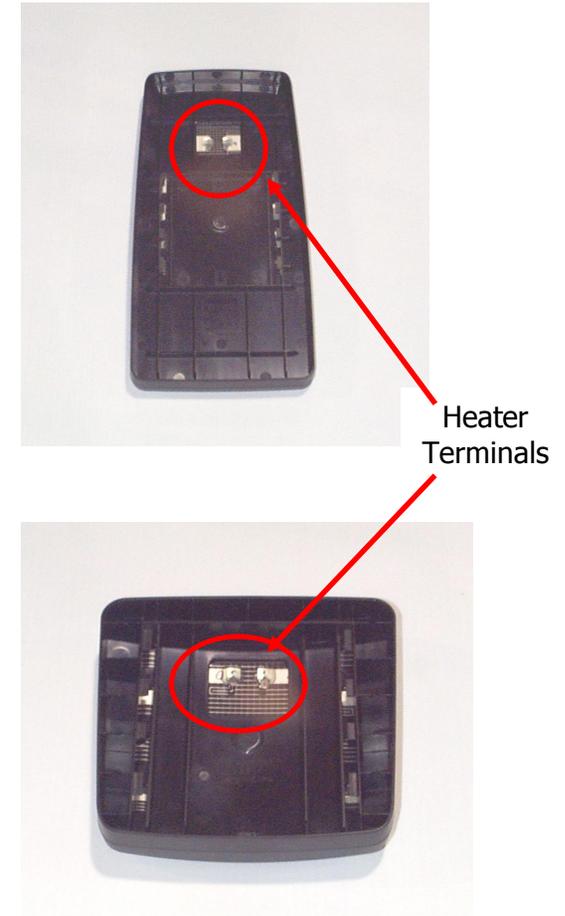

(T.7) Surface Finishes

The paint on the bracket and upper holder is a flexible, weather-resistant powder-coating. This coating requires no topcoat. If the paint is chipped or otherwise damaged, a matching wet paint may be used after the surface is properly prepared.



(W.1) Warranty Coverage

Lang-Mekra provides a warranty for production parts covering materials and workmanship. Warranty reimbursement includes part replacement, repair time at accepted labor rates and reasonable administrative costs. The time period of the warranty coverage and specific terms are determined by International.

The warranty will cover:

- ❑ Functional Quality of Components
- ❑ Lang-Mekra Workmanship
- ❑ Confirmed Field Failures
- ❑ Labor Costs for Replacement
- ❑ Reasonable Administrative Costs

The warranty will not cover:

- ❑ Glass Breakage and Other Impact, Abuse, Mistreatment
- ❑ Minor Re-assembly
- ❑ Unnecessary and/or improper Service
- ❑ Unauthorized Product Alterations and/or Additions
- ❑ Unreasonable Costs

Please Do Not Submit Warranty Claims for Items That Have Suffered Impact!

Parts Returned Exhibiting Impact Damage Will Be Denied Coverage, and May Be Returned Freight-Collect

Lang-Mekra reserves the right to inspect submitted warranty claims. Upon satisfactory performance and history, dealers, fleets and other end users may be granted coverage based on description alone. Evaluation points will include:

- ❑ Complete and Accurate Claim Descriptions
- ❑ Use of appropriate Replacement Parts
- ❑ Absence of Rejected Claims



Be sure to check the after-market part listings available through International for the latest revisions to this list.

Item Number	Int'l Part #	LM Aftermarket Part #	Part Description
1	3561611C96	594000501-PDC	MIRROR SYS PREMIUM,LH,BRT
1	3561599C97	594000505-PDC	MIRROR SYS PREMIUM,LH,BRT,CB
1	3561613C96	594000509-PDC	MIRROR SYS PREMIUM,LH,HTD,BRT
1	3561601C97	594000513-PDC	MIRROR SYS PREMIUM,LH,HTD,BRT,CB
1	3561615C96	594000001-PDC	MIRROR SYS PREMIUM,LH,HTD,LTD, BLK
1	3561617C96	594000517-PDC	MIRROR SYS PREMIUM,LH,HTD,LTD,BRT
1	3561605C97	594000521-PDC	MIRROR SYS PREMIUM,LH,HTD,LTD,BRT,CB
1	3561603C97	594000009-PDC	MIRROR SYS PREMIUM,LH,HTD,LTD,CB, BLK
1	3561619C96	594000005-PDC	MIRROR SYS PREMIUM,LH,HTD,RMT,LTD, BLK
1	3561621C96	594000525-PDC	MIRROR SYS PREMIUM,LH,HTD,RMT,LTD,BRT
1	3561609C97	594000529-PDC	MIRROR SYS PREMIUM,LH,HTD,RMT,LTD,BRT,CB
1	3561607C97	594000013-PDC	MIRROR SYS PREMIUM,LH,HTD,RMT,LTD,CB , BLK
2	3561600C97	594000506-PDC	MIRROR SYS PREMIUM, RH,BRT,CB
2	3561612C96	594000502-PDC	MIRROR SYS PREMIUM,RH,BRT
2	3561614C96	594000510-PDC	MIRROR SYS PREMIUM,RH,HTD,BRT
2	3561602C97	594000514-PDC	MIRROR SYS PREMIUM,RH,HTD,BRT,CB
2	3561616C96	594000002-PDC	MIRROR SYS PREMIUM,RH,HTD,LTD, BLK
2	3561618C96	594000518-PDC	MIRROR SYS PREMIUM,RH,HTD,LTD,BRT
2	3561606C97	594000522-PDC	MIRROR SYS PREMIUM,RH,HTD,LTD,BRT,CB
2	3561604C97	594000010-PDC	MIRROR SYS PREMIUM,RH,HTD,LTD,CB, BLK
2	3561620C96	594000006-PDC	MIRROR SYS PREMIUM,RH,HTD,RMT,LTD, BLK
2	3561622C96	594000526-PDC	MIRROR SYS PREMIUM,RH,HTD,RMT,LTD,BRT
2	3561610C97	594000530-PDC	MIRROR SYS PREMIUM,RH,HTD,RMT,LTD,BRT,CB
2	3561608C97	594000014-PDC	MIRROR SYS PREMIUM,RH,HTD,RMT,LTD,CB , BLK



If you have any questions, please contact Lang-Mekra Technical Support.
www.lang-mekra.com Tel: 1-888-MEKRA-4-U Email: quality@lang-mekra.com Fax: (803) 337 5265

2	2588601C93	594000533-PDC	Mirror System, Premium, 96+Bracket, LH Remote, Heat, CB, Light, Chrome
2	2588602C93	594000534-PDC	Mirror System, Premium, 96+Bracket, RH Remote, Heat, CB, Light, Chrome
3	3561628C97	594000532-PDC	MIRROR SYS PREMIUM,RH, HTD,RMT,LTD,BRT CB,W/LKD
3	3561623C97	594000508-PDC	MIRROR SYS PREMIUM,RH, BRT ,CB,W/LKD
3	3561629C96	594000504-PDC	MIRROR SYS PREMIUM,RH,BRT,W/LKD
3	3561624C97	594000516-PDC	MIRROR SYS PREMIUM,RH,HTD,BRT,CB,W/LKD
3	3561630C96	594000512-PDC	MIRROR SYS PREMIUM,RH,HTD,BRT,W/LKD
3	3561626C97	594000524-PDC	MIRROR SYS PREMIUM,RH,HTD,LTD,BRT,CB,W/LKD
3	3561632C96	594000520-PDC	MIRROR SYS PREMIUM,RH,HTD,LTD,BRT,W/LKD
3	3561625C97	594000012-PDC	MIRROR SYS PREMIUM,RH,HTD,LTD,CB,W/LKD, BLK
3	3561631C96	594000004-PDC	MIRROR SYS PREMIUM,RH,HTD,LTD,W/LKD, BLK
3	3561634C96	594000528-PDC	MIRROR SYS PREMIUM,RH,HTD,RMT,LTD,BRT,W/LKD
3	3561627C97	594000016-PDC	MIRROR SYS PREMIUM,RH,HTD,RMT,LTD,CB,W/LKD, BLK
3	3561633C96	594000008-PDC	MIRROR SYS PREMIUM,RH,HTD,RMT,LTD,W/LKD. BLK
4	2506299C3	584004025-PDC	BKT ASSY, BLK, HTD, RMT, PREMIUM,LH
4	2509017C3	584004509-PDC	BKT ASSY,BRT, HTD, RMT, PREMIUM,LH
4	2506300C4	584004029-PDC	BRACKET ASSY, BLK,HTD,RMT,LTD,CB,PREMIUM,LH
4	2506298C4	584004521-PDC	BRACKET ASSY, BRT SS, HTD, RMT, LTD, CB, PREMIUM, LH
4	2505304C4	584004513-PDC	BRACKET ASSY, BRT,HTD,LTD,CB,PREMIUM,LH
4	2505320C3	584004501-PDC	BRACKET ASSY, BRT,LH
4	2505300C4	584004021-PDC	BRACKET ASSY,BLK,HTD,CB,PREMIUM,LH
4	2505296C4	584004505-PDC	BRACKET ASSY,BRT,CB,LH
4	2505325C3	584004517-PDC	BRACKET ASSY,BRT,HTD, PREMIUM,LH
4	2590938C1	584004037-PDC	Bracket, 96", Black, Manual, Heat, CB, LH
4	2590936C1	584004533-PDC	Bracket, 96", SS Remote, Heat, Light, CB, LH
5	2505302C4	584004030-PDC	BRACKET ASSY, BLK,HTD,RMT,LTD,CB,PREMIUM,RH
5	2505326C3	584004518-PDC	BRACKET ASSY, BRT, RMT, HTD, PREMIUM, RH
5	2505305C4	584004522-PDC	BRACKET ASSY, BRT,HTD,RMT,LTD,CB,PREMIUM,RH



If you have any questions, please contact Lang-Mekra Technical Support.
www.lang-mekra.com Tel: 1-888-MEKRA-4-U Email: quality@lang-mekra.com Fax: (803) 337 5265

5	2505321C3	584004502-PDC	BRACKET ASSY, BRT,RH
5	2505324C3	584004026-PDC	BRACKET ASSY,BLK,HTD,RMT,LTD,PREMIUM,RH
5	2505298C4	584004506-PDC	BRACKET ASSY,BRT,CB,RH
5	2590939C1	584004038-PDC	Bracket, 96", Black, Manual, Heat, CB, RH
5	2590937C1	584004534-PDC	Bracket, 96", SS Remote, Heat, Light, CB, RH
6	2505812C3	584004032-PDC	BRACKET ASSY, BLK,HTD,RMT,LTD,CB,PREMIUM,RH,W/LKD
6	2505810C3	584004524-PDC	BRACKET ASSY, BRT,HTD,RMT,LTD,CB,PREMIUM,RH,W/LKD
6	2505303C3	584004520-PDC	BRACKET ASSY, BRT,HTD,RMT,LTD,PREMIUM,RH,W/LKD
6	2505811C3	584004028-PDC	BRACKET ASSY,BLK,PREMIUM,RH,W/LKD
6	2505809C4	584004508-PDC	BRACKET ASSY,BRT,CB,RH,W/LKD
6	2505301C3	584004504-PDC	BRACKET ASSY,BRT,RH,W/LKD
7	2585911C2	613600001N-PDC	Look Down Mirror Glass with Bezel
9	2506242C92	084002002-PDC	CB ANTENNA HOLDER ASSY
11	2505310C1	144003120-PDC	PREMIUM BEZEL ASSEMBLY,REMOTE LH
11	2505288C1	144003110-PDC	PREMIUM BEZEL ASSY,MANUAL LH
12	2505311C1	144003140-PDC	PREMIUM BEZEL ASSEMBLY,REMOTE RH
12	2505293C1	144003130-PDC	PREMIUM BEZEL ASSY, MANUAL RH
13	2505289C1	134003110-PDC	PREMIUM BACK COVER,BLK,LH
13	2505294C1	134003120-PDC	PREMIUM BACK COVER,BLK,RH
14	2505297C1	134002110-PDC	PREMIUM BACK COVER,BRT,LH
14	2505299C1	134002120-PDC	PREMIUM BACK COVER,BRT,RH
15	2505817C2	154003100-PDC	PREMIUM FLAT GLASS PLATE ASSY
15	2505818C2	154003107-PDC	PREMIUM FLAT GLASS PLATE ASSY, HTD
16	2505819C2	154003110-PDC	PREMIUM CONVEX GLASS PLATE ASSY
16	2505820C2	154003117-PDC	PREMIUM CONVEX GLASS PLATE ASSY, HTD
17	2506236C91	614000010-PDC	CLAMP KIT (2)
18	2506238C91	614006000-PDC	STRUCTURE PLATE ASSEMBLY-MANUAL
19	2506274C91	614006113-PDC	STRUCTURE PLATE ASSEMBLY-REMOTE



If you have any questions, please contact Lang-Mekra Technical Support.
www.lang-mekra.com Tel: 1-888-MEKRA-4-U Email: quality@lang-mekra.com Fax: (803) 337 5265




20	2506241C91	084000100-PDC	REPLACEMENT CB HARNESS
21	2506223C92	614002011-PDC	MIRROR HEAD ASSY,LH,BRT
21	2506225C92	614003021-PDC	MIRROR HEAD ASSY,LH,HTD,BRT
21	2506227C92	614001521-PDC	MIRROR HEAD ASSY,LH,HTD,LTD,BLK
21	2506229C92	614003521-PDC	MIRROR HEAD ASSY,LH,HTD,LTD,BRT
21	2506231C92	614001541-PDC	MIRROR HEAD ASSY,LH,HTD,LTD,RMT,BLK
21	2506233C92	614003541-PDC	MIRROR HEAD ASSY,LH,HTD,LTD,RMT,BRT
22	2506224C92	614002012-PDC	MIRROR HEAD ASSY,RH,BRT
22	2506226C92	614003022-PDC	MIRROR HEAD ASSY,RH,HTD,BRT
22	2506228C92	614001522-PDC	MIRROR HEAD ASSY,RH,HTD,LTD,BLK
22	2506230C92	614003522-PDC	MIRROR HEAD ASSY,RH,HTD,LTD,BRT
22	2506232C92	614001542-PDC	MIRROR HEAD ASSY,RH,HTD,LTD,RMT,BLK
22	2506234C92	614003542-PDC	MIRROR HEAD ASSY,RH,HTD,LTD,RMT,BRT
23	2505306C91	084003000-PDC	CLEARANCE LIGHT,LH
23	2505290C1	084001000-PDC	REFLECTOR, LH
24	2505307C91	084002000-PDC	CLEARANCE LIGHT, RH
24	2505295C1	084000000-PDC	REFLECTOR, RH
25	2505821C1	083492312N-PDC	ACTUATOR ASSY
26	2506221C1	114000100-PDC	SPLIT COVER KIT (upper and lower)
27	2506240C91	904000030-PDC	REPLACEMENT WIRE HARNESS KIT
28	2509065C91	614000001-PDC	Upper Holder Kit, LH
28	2509068C91	614000004-PDC	Upper Holder Kit, LH No CB Ground
28	2509066C91	614000002-PDC	Upper Holder Kit, RH
28	2509069C91	614000005-PDC	Upper Holder Kit, RH No CB Ground
28	2509067C91	614000003-PDC	Upper Holder Kit, RH with Lookdown Attachment
28	2509070C91	614000006-PDC	Upper Holder Kit, with Lookdown Attachment, No CB Ground
29	2507655C91	614003501-PDC	FLIP OUT ARM KIT LEFT
29	2507656C91	614003502-PDC	FLIP OUT ARM KIT RIGHT



If you have any questions, please contact Lang-Mekra Technical Support.
www.lang-mekra.com Tel: 1-888-MEKRA-4-U Email: quality@lang-mekra.com Fax: (803) 337 5265


30	2509146C91	614000007-PDC	Kit, Flipout Receiver, LH with Rivet
30	2509147C91	614000008-PDC	Kit, Flipout Receiver, RH with Rivet
31	2586538C91	204004401-PDC	Lower Holder Kit, LH
31	2586539C91	204004402-PDC	Lower Holder Kit, RH
32	2590983C1	204004501-PDC	NGV Lower Holder Gasket, LH
32	2590984C1	204004500-PDC	NGV Lower Holder Gasket, RH
N/A	2509981C91	614000009-PDC	Back Cover and Bezel Fastener Kit
N/A	2506243C91	904000100-PDC	TESTER UNIT BOX

(W.3) Illustrations

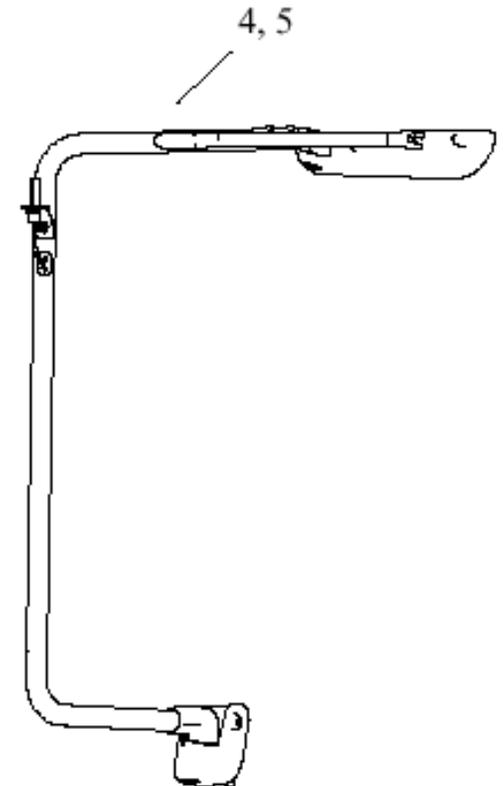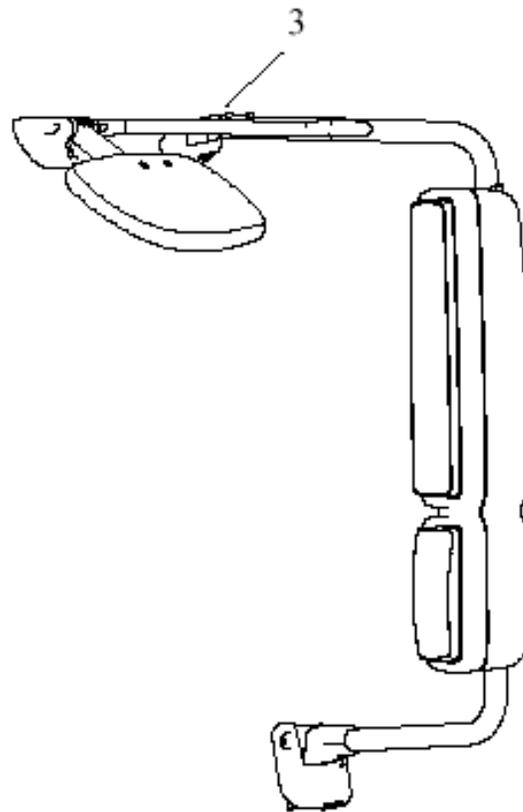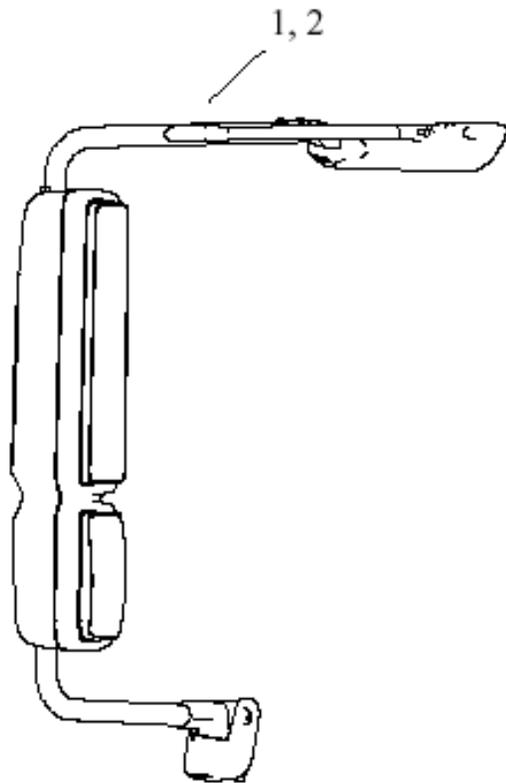




If you have any questions, please contact Lang-Mekra Technical Support.
www.lang-mekra.com Tel: 1-888-MEKRA-4-U Email: quality@lang-mekra.com Fax: (803) 337 5265

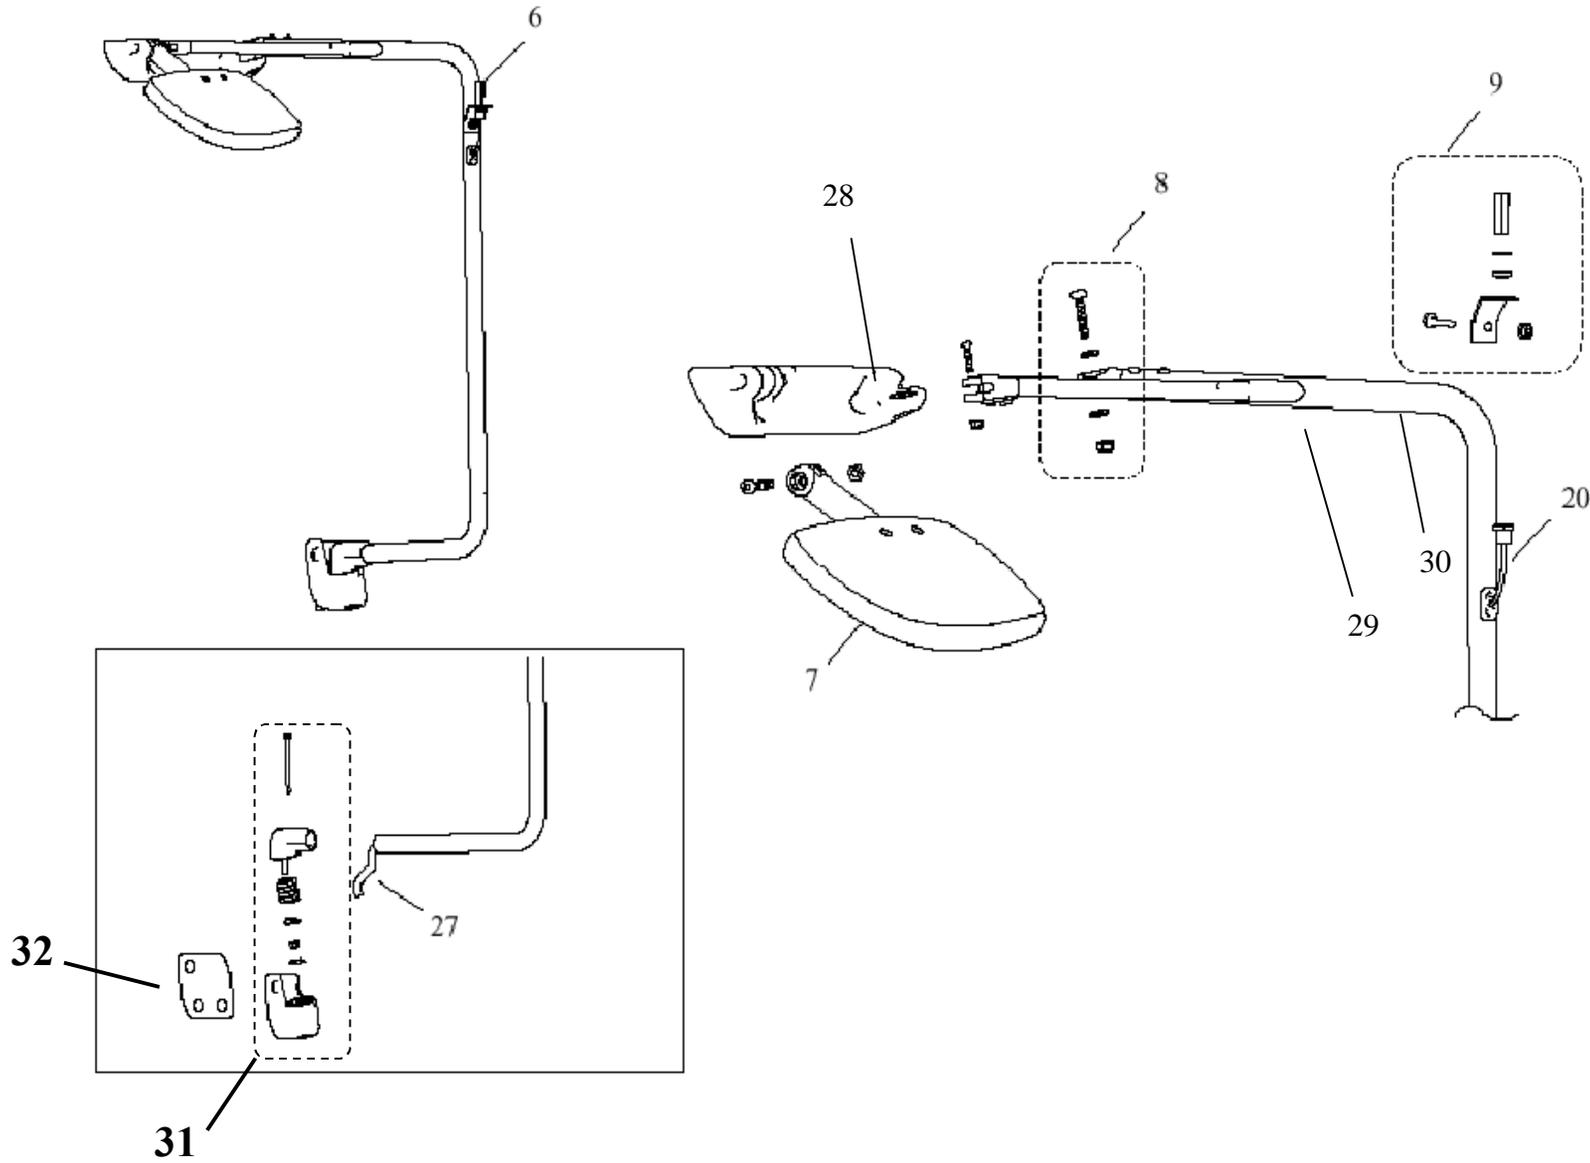



If you have any questions, please contact Lang-Mekra Technical Support.
www.lang-mekra.com Tel: 1-888-MEKRA-4-U Email: quality@lang-mekra.com Fax: (803) 337 5265

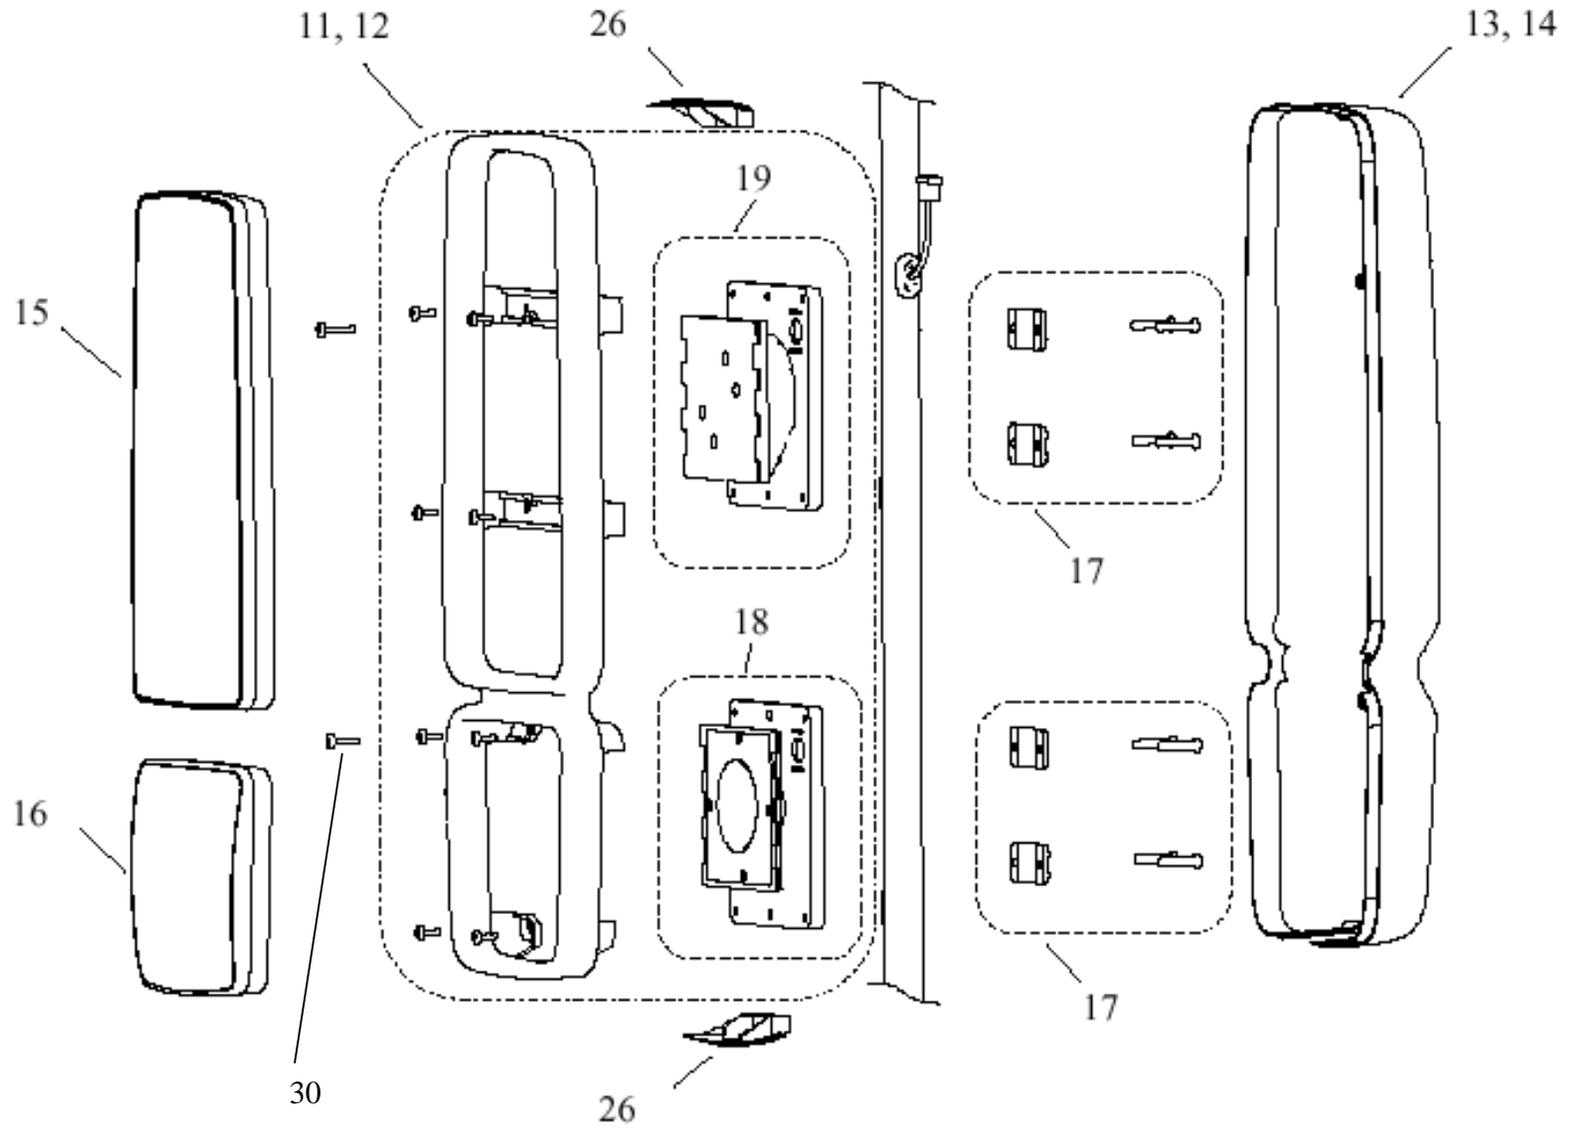



If you have any questions, please contact Lang-Mekra Technical Support.
www.lang-mekra.com Tel: 1-888-MEKRA-4-U Email: quality@lang-mekra.com Fax: (803) 337 5265

